

Reg. No. :

--	--	--	--	--	--	--	--	--	--

Question Paper Code: 55032

B.E. / B.Tech. DEGREE EXAMINATION, NOV 2017

Fifth Semester

Electrical and Electronics Engineering

15UEE502 - POWER SYSTEM ANALYSIS

(Regulation 2015)


Duration: Three hours

Maximum: 100 Marks

Answer ALL Questions

PART A - (10 x 1 = 10 Marks)

1. Which sequence component is represented by the following phasor?




- (a) Positive sequence (b) Zero sequence
(c) Negative sequence (d) None of these
2. Which among the following buses constitute the maximum number in a power system?
(a) Slack bus (b) P Q bus (c) P V bus (d) All the above
3. Which among the following methods are highly accurate?
(a) Gauss Seidel method (b) Newton Raphson method
(c) Fast decoupled low flow method (d) All the above
4. What type of convergence takes place in NR method?
(a) Linear convergence (b) Geometric convergence
(c) Quadratic convergence (d) All the above

Generator: 40MVA, 25 KV , $X'' = 20\%$

Motor : 50MVA, 11 KV , $X'' = 30\%$

Y-Y Transformer : 40MVA, 33/220 KV , $X = 15\%$

Y- Δ Transformer : 30MVA, 11/220 KV (Δ/Y), $X = 15\%$

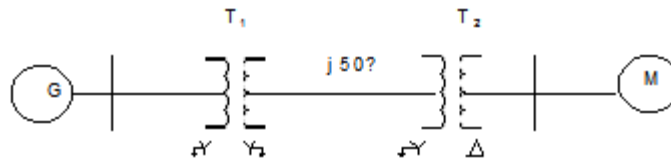

(16)

17. (a) Clearly explain the algorithmic steps for solving load flow equations using Gauss Seidel method when the system contains all types of buses. Assume that the generators at the P-V buses have adequate Q-limits. (16)

Or

- (b) Consider the power system with the following data:

$$Y_{\text{bus}} = \begin{bmatrix} -j12 & j8 & j4 \\ j8 & -j12 & j4 \\ j4 & j4 & -j8 \end{bmatrix}$$

Bus No.	Type	Generation		Load		Voltage	
		P	Q	P	Q	Magnitude	Angle
1	Slack	-	-	-	-	1.0	0
2	PV	5.0	-	0	-	1.05	-
3	PQ	0	0	3.0	0.5	-	-

Assume that the bus 2 can supply any amount of reactive power. With a flat voltage start, perform the first iteration of power flow analysis using NR method. (16)

18. (a) Explain the step by step procedure for symmetrical fault analysis for three phase fault using bus impedance matrix. (16)

Or

- (b) The bus impedances matrix of 4 bus system with values in p.u is given by

$$Z_{\text{bus}} = j \begin{bmatrix} 0.15 & 0.08 & 0.04 & 0.07 \\ 0.08 & 0.15 & 0.06 & 0.09 \\ 0.04 & 0.06 & 0.13 & 0.05 \\ 0.07 & 0.09 & 0.05 & 0.12 \end{bmatrix}$$

In this system, generators are connected to buses 1 and 4 and their sub transient reactances were included when finding Z_{bus} . If pre fault current is neglected, find

the sub transient current in p.u in the fault for a 3 ph fault on bus-4. Assume pre fault voltage as 1 p.u. If the sub transient reactances of generator in bus 2 is 0.2 p.u, find the sub transient fault current supplied by generator. (16)

19. (a) A synchronous generator and motor are rated 30 MVA, 13.2kV and both have sub transient reactance of 20%. The line connecting them has reactance of 10% on the base of machine ratings. The motor is drawing 20,000kW at 0.8 pf leading and terminal voltage of 12.8kV when a symmetrical 3 phase fault occurs at the motor terminals. Find the sub transient current in the generator, motor and fault point by using interval voltages of the machines. (16)

Or

- (b) Draw the sequence network connection for LL fault at any point in a power system and obtain an expression for the fault current. (16)
20. (a) Describe the algorithm for Modified Euler method of finding the solution for power system stability problem studies. (16)

Or

- (b) Derive the swing equation of synchronous generator connected to infinite bus from the rotor dynamics. (16)
-