

Reg. No. :

--	--	--	--	--	--	--	--	--	--

Question Paper Code: 46101

B.E. / B.Tech. DEGREE EXAMINATION, DEC 2020

Sixth Semester

Civil Engineering

14UCE601 - DESIGN OF STEEL AND TIMBER STRUCTURES

(Regulation 2014)

(Use of IS 800:2007, IS 875 (part I, II & III) : 1987, SP 6-1964 and IS 883:1994 are permitted)

Duration: One hour

Maximum: 30 Marks

PART A - (6 x 1 = 6 Marks)

(Answer any six of the following questions)


1. A fillet weld may be termed as
 - (a) miter weld
 - (b) concave weld
 - (c) convex weld
 - (d) none of these
2. If d is the distance between the flange angles, the vertical stiffeners in plate girders are spaced not greater than
 - (a) d
 - (b) $1.25 d$
 - (c) $1.5 d$
 - (d) $1.75 d$
3. If the unsupported length of a stanchion is 4 meter and least radius of gyration of its cross-section is 5, the slenderness ratio of the stanchion, is
 - (a) 60
 - (b) 70
 - (c) 80
 - (d) 90
4. The main assumption of the method of simple design of steel frame work, is
 - (a) beams are simply supported
 - (b) all connections of beams, girders and trusses are virtually flexible
 - (c) members in compression are subjected to forces applied at appropriate eccentricities
 - (d) all the above

5. A compression member consisting of angle sections may be a
- (a) continuous member (b) discontinuous single angle strut
(c) discontinuous double angle strut (d) none of these
6. The Indian standard code which deals with steel structures, is
- (a) IS : 875 (b) IS : 800 (c) IS : 456 (d) IS : 1893
7. The minimum pitch of rivet holes of diameter d should not be less than
- (a) d (b) $2.5 d$ (c) $1.5 d$ (d) $2 d$
8. The strength of a riveted lap joint is equal to its
- (a) shearing strength (b) bearing strength
(c) tearing strength (d) least of (a), (b) and (c)
9. The timber to be used in structure must conform to the standards specified in
- (a) BIS 3626-1969 (b) IS 883-1994
(c) IS 3629-1986 (d) BIS 3620-1980
10. Web crippling generally occurs at
- (a) flanges of the beam (b) root of the radius
(c) mid span of the beam (d) mid depth of the web


PART – B (3 x 8= 24 Marks)

(Answer any three of the following questions)

11. Design a lap joint between the two plates each of width 120mm, if the thickness of one plate is 16mm and the other is 12mm. The joint has to transfer a design load of 160kN. The plates are of Fe410 grade. Use bearing type bolts. (8)

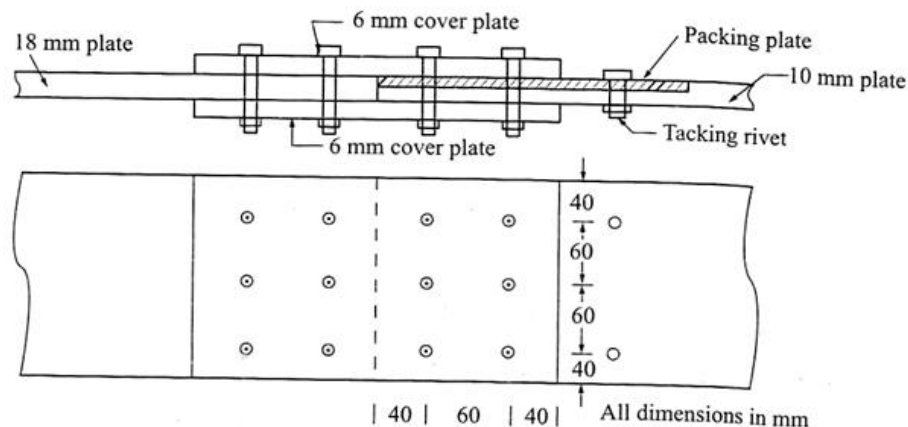

12. Determine the design tensile strength of the plate $200\text{ mm} \times 12\text{ mm}$ with the holes for 16 mm diameter bolts as shown in figure. Steel used is of Fe415 grade quality. (8)

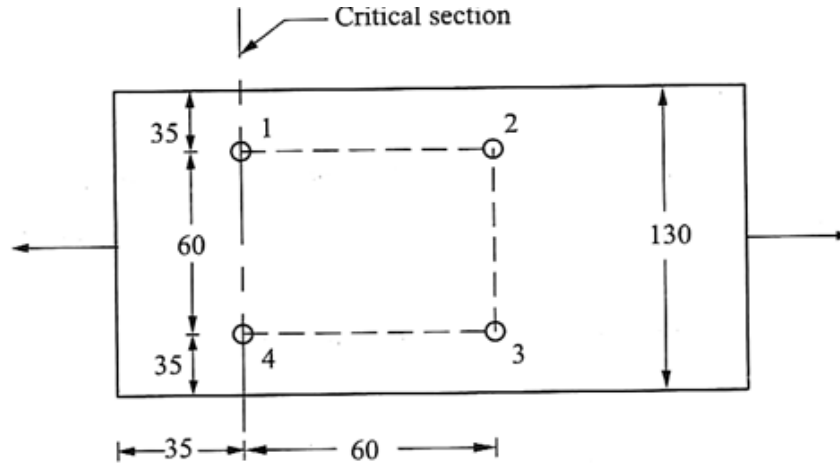

13. Calculate the strength of a discontinuous strut of length 3.2 m . The strut consist of two unequal angles $\text{ISA } 100 \times 75 \times 8\text{ mm}$ ($f_y = 250\text{ N/mm}^2$), with long legs connected and placed,
 (i) On the opposite sides of Gusset plate
 (ii) On the same side of the Gusset plate. (8)
14. Design a welded plate girder using Fe 415 steel for a span of 25 m to carry a load of 30 kN/m . (8)
15. A column has to carry a load of 600 kN . Its effective height is 4.0 m . Design a built up solid wood column of deodar. (8)