

Reg. No. :

--	--	--	--	--	--	--	--	--	--

Question Paper Code: 95702

B.E./B.Tech. DEGREE EXAMINATION, MAY 2022

Fifth Semester

Mechanical Engineering

19UME502 – DESIGN OF MACHINE ELEMENTS

(Regulation 2019)

Duration: Three hours

Maximum: 100 Marks

Answer ALL Questions

PART A - (10 x 1 = 10 Marks)

1. The ability of material to resist scratching and indentation is CO1- U
(a) Hardness (b) Stiffness (c) Resilience (d) Surface finish
2. This refers to the total energy which can be used before material breaks. CO1- U
(a) Hardness (b) Stiffness (c) Toughness (d) Resilience
3. A key in an element which is used to transfer CO1- U
(a) Reciprocating motion (b) Rotary motion
(c) Loading (d) None of these
4. _____ joint is used to connect two rods whose axes are either CO1- U
coinciding or intersecting and lying in one plane.
(a) Knuckle (b) Welded (c) Cotter (d) Threaded
5. A stud is a bolt in which one of the following is replaced by a CO1- U
(a) Threaded end (b) Brazed end (c) Welded end (d) Bonded end
6. A bolt of uniform strength has _____ at the threaded and shank portion. CO1- U
(a) equal strength (b) no strength
(c) dual strength (d) very weak

7. In _____ spring, wires are coiled very closely. CO1- U
 (a) open coiled b) cross coiled (c) close coiled (d) perpendicular coiled
8. The springs made in the form of a cone disk to carry a high compressive force is CO1- U
 (a) Helical (b) Belleville (c) Leaf (d) none of these
9. Which one of the following is a criterion in the design of hydrodynamic journal bearings? CO1- U
 (a) Sommerfeld number (b) Rating life
 (c) Specific dynamic capacity (d) Rotation factor
10. What is the most important feature of lubrication that determines the life of a bearing? CO1- U
 (a) viscosity (b) grade of grease (c) E.P. additives (d) viscosity index

PART – B (5 x 2= 10Marks)

11. Explain the methods to reduce stress concentration. CO1- U
12. Differentiate between keys and splines. CO2- U
13. Explain the term self-locking of power screws. CO3- U
14. State any two functions of springs. CO4- U
15. What is a journal bearing? List any two applications. CO5- U

PART – C (5 x 16= 80 Marks)

16. (a) A leaf spring in an automobile is subjected to cyclic stresses. The average stress is 150 MPa, variable stress is 50 MPa, ultimate stress is 630 MPa, yield point stress is 350 MPa and endurance limit stress is 150 MPa. Estimate, under what factor of safety the spring is working, by Goodman and Soderberg relation. CO2-App (16)

Or


- (b) A shaft of 760mm length is simply supported at its ends. It is supported to a central concentrated cyclic load that varies from 12KN to 36KN. Determine the diameter of the shaft assuming a factor of safety of 2, size correction factor of 0.8 and surface correction factor of 0.85. The material properties are ultimate strength = 500MPa; yield strength = 280MPa and endurance limit = 250MPa. Fatigue stress concentration factor = 1.5. CO2-App (16)

17. (a) A solid circular shaft is subjected to a bending moment of 3000 N-m and a torque of 10 000 N-m. The shaft is made of 45 C 8 steel having ultimate tensile stress of 700 MPa and a ultimate shear stress of 500 MPa. Assuming a factor of safety as 6, determine the diameter of the shaft. CO2-App (16)

Or

- (b) A factory line shaft is 4.5 m long and transmits 75 kW at 200 rpm. The allowable stress in shear is 49 MPa and the maximum allowable twist is 1° in a length of 20 times diameter. Determine the shaft diameter. CO2-App (16)

18. (a) A 50 mm diameter solid shaft is welded to a flat plate as shown in Figure. If the size of the weld is 15 mm, find the maximum normal and shear stress in the weld. CO2- App (16)

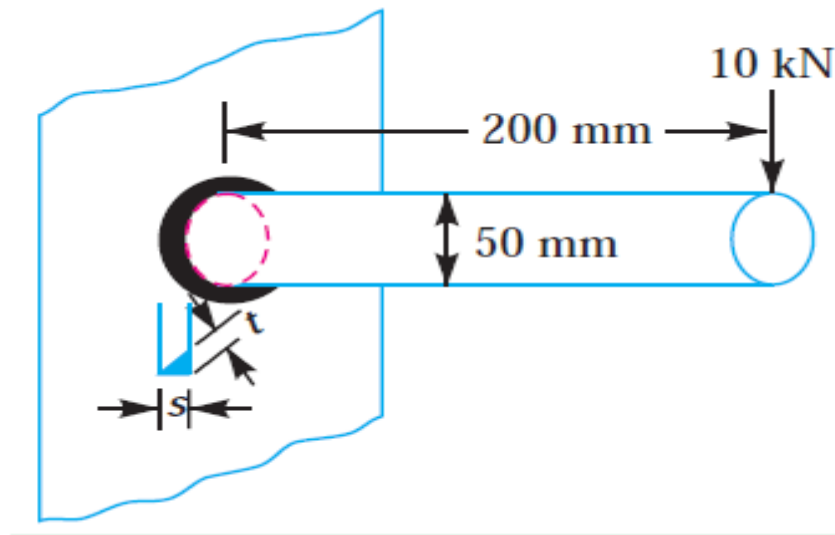

Or

- (b) The cylinder head of a steam engine is subjected to a steam pressure of 0.7 N/mm². It is held in position by means of 12 bolts. A soft copper gasket is used to make the joint leak-proof. The effective diameter of cylinder is 300 mm. Find the size of the bolts so that the stress in the bolts is not to exceed 100 MPa. CO2- App (16)

19. (a) A compression helical spring is required to exert a minimum force of 200 N and a maximum force of 600 N and the deflection for this change in the load is to be 15 mm. The load is static. The ultimate tensile stress is 1393 MPa and the shear is 606 MPa. Calculate 1) Diameter of the spring wire. 2) Mean coil diameter and 3) Number of active turns. CO2- App (16)

Or

- (b) A truck spring has 12 number of leaves, two of which are full length leaves. The spring supports are 1.05 m apart and the central band is 85 mm wide. The central load is to be 5.4 kN with a permissible stress of 280 MPa. Determine the thickness and width of the steel spring leaves. The ratio of the total depth to the width of the spring is 3. Also determine the deflection of the spring. CO2- App (16)
20. (a) Design a journal bearing for a centrifugal pump with the following data. CO2- App (16)
Diameter of the journal = 150mm
Load on bearing = 40 kN
Speed of journal = 900 rpm
- Or
- (b) If a ball bearing is subjected to a radial load of 10 kN and the expected life for 90% of the bearing is 6000hr, calculate the dynamic load carrying capacity of the bearing when the shaft rotates at 1250rpm. CO2- App (16)