

Reg. No. :

| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|

Question Paper Code: 97702

B.E./B.Tech. DEGREE EXAMINATION, NOV 2022

Seventh Semester

Mechanical Engineering

19UME702 – FINITE ELEMENT ANALYSIS

(Regulation 2019)

Duration: Three hours

Maximum: 100 Marks

Answer ALL Questions

PART A - (10 x 1 = 10 Marks)

- _____ is a Numerical method for solving problems of Engineering and mathematical physics. CO1- U
(a) Finite Element Analysis (b) Finite Element Method
(c) Both (a) & (b) (d) none of the above
- The art of subdividing a structure into a convenient number of smaller element is known as..... CO1- U
(a) Non – Structural Problems (b) Structural Problems
(c) Discretization of structure (d) None of the above
- _____ is a force acting at a particular point which causes displacement. CO1- U
(a) Traction force (b) Body force (c) Point load (d) None of the above
- Assemblage of bars is called_____ CO1- U
(a) Truss (b) Beams (c) Spring (d) None of the above
- Linear Strain Triangular Element has _____ number of nodes. CO1- U
(a) 3 (b) 6 (c) 12 (d) 24
- In plane strain analysis CO1- U
(a) $\rho_z = 0$ (b) $\gamma_{xz} = 0$ (c) $\gamma_{yz} = 0$ (d) All of the above
- A motion which repeats itself after equal interval of time is called CO1- U
(a) Cycle (b) Frequency (c) Counter flow (d) Damping

- 8 The causes of vibration is/are CO1- U
 (a) Winds (b) Earthquakes (c) Elastic Nature (d) All of the above
- 9 In non-structural problems _____ at each nodal point is obtained CO1- U
 (a) Displacement (b) Temperature (c) Stress (d) Strain
- 10 _____ is imaginary line that connects a series of points CO1- U
 (a) Path Line (b) Stream Line (c) Inviscid Flow (d) None of the above

PART – B (5 x 2= 10Marks)

- 11 Explain the Aspect Ratio. CO1- U
- 12 Explain Degrees of freedom. CO1- U
- 13 Write down the stress-strain relationship matrix for plane strain condition. CO1- U
- 14 State difference between Direct and Iterative methods for solving system of equations. CO1- U
- 15 Write down the expression for stiffness matrix in 2D fluid mechanics. CO1- U

PART – C (5 x 16= 80 Marks)

- 16 (a) The following differential equation is available for a physical phenomenon CO2- App (16)


$$\frac{d^2y}{dx^2} - 10x^2 = 5; \quad 0 \leq x \leq 1$$

with boundary conditions as $y(0) = 0$ and $y(1) = 0$

By using Galerkins method of weighted residuals to find an approximate solution of the above different equation and also compare with exact solution.

Or


- (b) A simply supported beam subjected to Uniformly Distributed Load over entire span. Analyze the bending moment and deflection at mid-span by using Rayleigh Ritz method and compare with exact solution. CO4- Ana (16)
- 17 (a) Consider a bar as shown in figure. Cross-sectional area of the bar is 750mm^2 and Young's Modulus is $2 \times 10^5 \text{ N/mm}^2$. If $u_1=0.5\text{mm}$ and $u_2 = 0.625\text{mm}$, calculate the following: CO2- App (16)
- (i) Displacement at point, P
 (ii) Strain, ϵ
 (iii) Stress, σ
 (iv) Strain Energy, U
 (v) Element Stiffness Matrix [K]

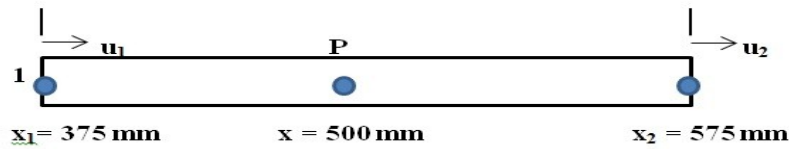


Or

- (b) An axial load of 4×10^5 N is applied at 30°C to the rod as shown in the figure. The temperature is then raised to 60°C . Calculate the following: CO2- App (16)

- (i) Assemble the K and F matrices
- (ii) Nodal Displacements
- (iii) Stresses in each material
- (iv) Reactions at each nodal point

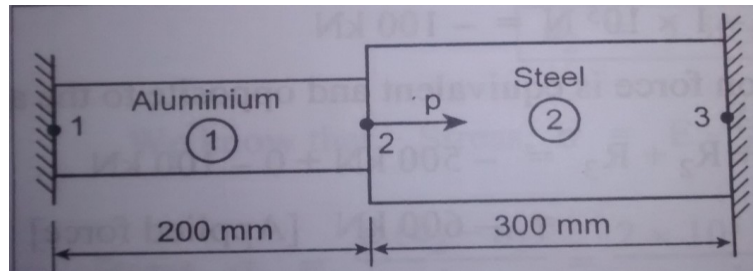


- 18 (a) For the Isoparametric quadrilateral element shown in figure, determine the local co-ordinates of the point P which has Cartesian co-ordinates (7,4). CO2- App (16)

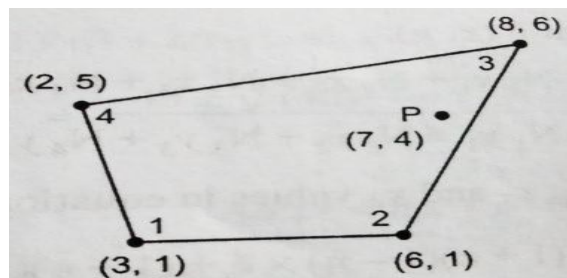


Or

- (b) Consider a quadrilateral element as shown in figure. The co-ordinates are $\xi=0.5$ and $\eta=0.5$. Evaluate CO2- App (16)
- (i) Jacobian Matrix
 - (ii) Strain-Displacement Matrix.

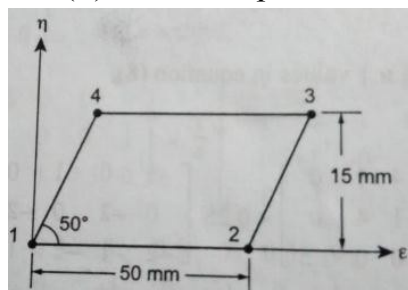

Or


- 19 (a) Compare the natural frequencies of longitudinal vibration of the CO4- Ana (16) unconstrained stepped bar as shown in the figure.

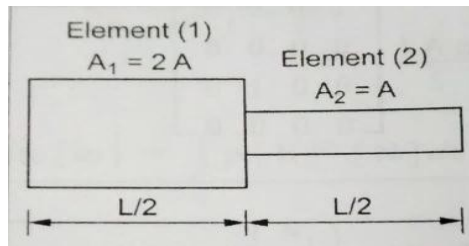


Or

- (b) Compare the eigen values and frequencies for the stepped bar as CO4- Ana (16) shown in the figure.

Take, Young's modulus $E = 2 \times 10^5 \text{ N/mm}^2$,
Unit weight Density $= 0.8 \times 10^{-4} \text{ N/mm}^3$

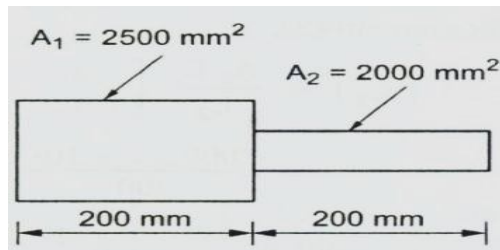

- 20 (a) Evaluate the temperature distribution in a square region with CO6- Eva (16) uniform energy generation as shown in figure. Assume that there is no temperature variation in the z-direction. Take $k=30\text{W/cm}^\circ\text{C}$, $l=10\text{cm}$, $T_\infty=50^\circ\text{C}$, $q=100\text{W/cm}^3$.

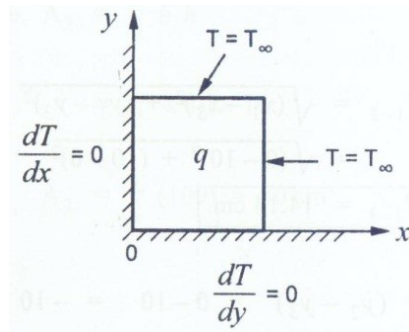

Or

- (b) A steel rod of diameter $d= 2 \text{ cm}$, Length $L=5 \text{ cm}$ and thermal CO6- Eva (16) conductivity $k = 50\text{W/m}^\circ\text{C}$ is exposed at one end to a constant temperature of 320°C . The other end is in ambient air of temperature 20°C with a convection coefficient of $h = 100 \text{ W/m}^2^\circ\text{C}$. Evaluate the temperature at the midpoint of the rod.

